


ER14505H

SPECIFICATION : 23±2°C


Nominal capacity (2mA~2V):	2.4Ah
Rated voltage :	3.6V
Max constant current of discharge:	100mA
Max discharge current(pulse) :	200mA
Weight :	22g
Operating temperature range :	-55~85°C

U.L. Component Recognition MH 29130


Discharge characteristics at 23±2°C

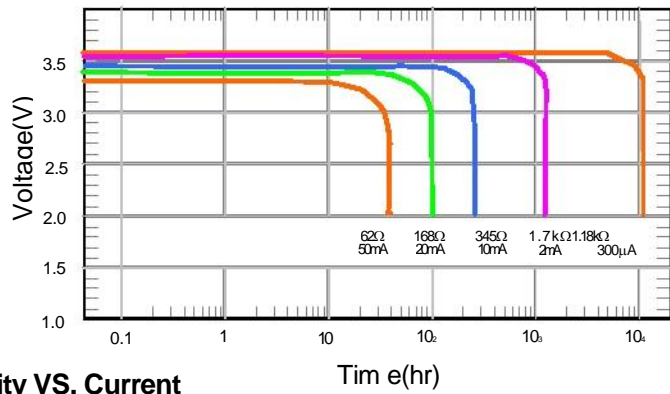

Capacity VS. Current

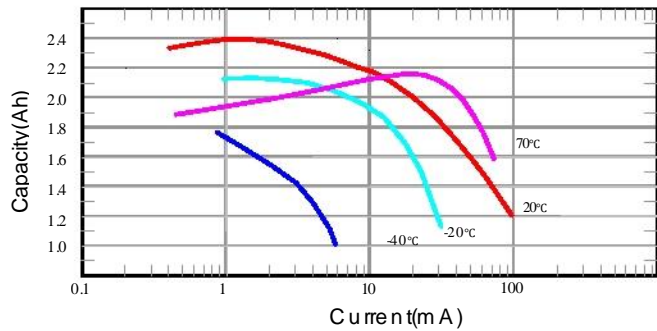

Voltage VS. Temperature

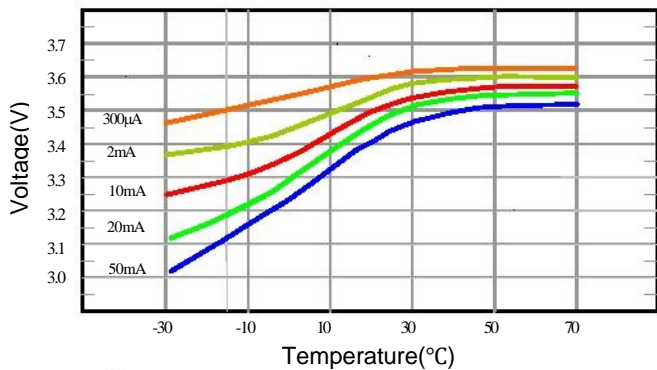

S: Standard termination

Notes:

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins

Important Notes

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.



DMI International Ltd
 Unit 4, Wolseley Business Park
 Plymouth
 Devon PL2 3BY

www.dmi-international.com

U.L. Component Recognition MH 45782